

**QUALITY CONVEYOR
TOASTERS AND OVENS BY:**



FOODSERVICE EQUIPMENT SPECIALISTS

- ✓ **Simple To Use**
- ✓ **Durable**
- ✓ **Versatile**
- ✓ **Energy Efficient**
- ✓ **Safety**
- ✓ **Productive**
- ✓ **Customer Focused**



CBT-15 CONTACT TOASTER Made in the USA

- Great For HIGH Volume Bun/Roll Contact Toasting
- 2 Sided Heat Platen For Toasting Crowns and Heels
- Spring Loaded Pressure Plate (no adjustment knobs)
- Dual, Drive Systems
- Adjustable Conveyor Speed
- Adjustable Thermostatic Heat Control

2 Openings: 13" (55.4 cm) Wide, 1 1/4" (35.1 cm) Deep

Easily Removable Panels for Cleaning

Consistent Results From Start to Finish

Why BELLECO?

- Basic, Simple Operation
- Durable, Rugged Construction
- Forced Convection/Cooler Exteriors
- Inexpensive to Operate
- 24 Hrs/Day, 7 Days/Week Service

FOR SALES ASSISTANCE IN THE U.S.A. AND CANADA, CALL TOLL FREE 1-877-854-8006 OR FAX 207-283-8080
E-Mail: sales@bellecocooking.com • OR VISIT OUR WEB SITE: <http://www.bellecocooking.com>



Refer to Installation on Reverse

**QUALITY CONVEYOR
TOASTERS AND OVENS BY:**



FOODSERVICE EQUIPMENT SPECIALISTS

Model CBT-15 Contact Toaster

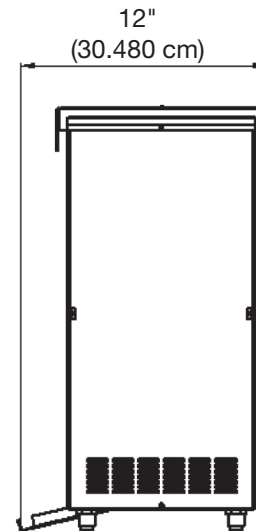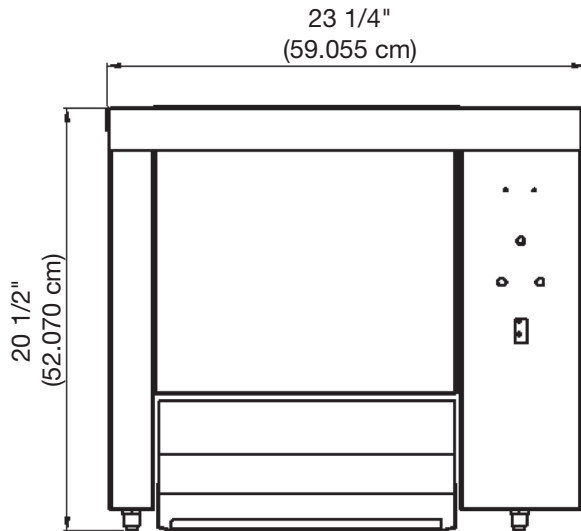

CONSTRUCTION:

Spot-welded stainless steel construction. Unit is easily disassembled for cleaning. Single aluminum heat platen located in the center of the food zone provides even heating for maximum efficiency.

CONTROL PANEL: Located on the right front of unit. Contains the ON/OFF Rocker Switch, Speed Control, Thermostatic Heat Control and Indicator Light.

OPERATION: Place Rocker Switch in the ON position. Unit is now in full power mode. Adjust temperature control and conveyor speed to desired heat and pass time. Allow approximately 20-30 minutes for unit to warm up

ELECTRICAL DATA:

Model	Volts	Hz/ Phase	kW	Amps	Power Supply
CBT-15	208	60/1	3.2	15.6	6-20P
CBT-15	220	60/1	3.2	14.7	6-20P
CBT-15	240	60/1	3.2	13.5	6-20P



CLASSIFIED
TO NSF-4



6-20P

It is our policy to build equipment that is ETL Listed in the USA and Canada and ETL Sanitation Classified to NSF 4. However, our continued process of product improvements makes it necessary to submit new models to the agencies as they are developed and consequently not all models bear the appropriate agency labels at all times.

CBT-15 toasters are furnished with a 20 amp NEMA 6-20P plug for plug in installation in a 20 amp 6-20R receptacle.

INSTALLATION: Counter model; furnished with 1" adjustable legs and 4 foot cord. Units should be located so that the air around the fan motor intake does not contain grease or steam and does not exceed 100° F.

SHIPPING DATA: Class 85
Up to 126 lbs.

WARRANTY: Two (2) year parts and one (1) year labor/elements in the United States and Canada. Warranty is limited to the original purchaser effective from the date of installation (or 18 months from date of shipment from Belleco).



FOODSERVICE EQUIPMENT SPECIALISTS

P.O. Box 880 Saco, ME / USA 04072

FOR TECHNICAL ASSISTANCE IN THE U.S.A.
AND CANADA, CALL TOLL FREE:
1-877-854-8006, 24 HRS/DAY

E-Mail: sales@bellecocooking.com

OR VISIT OUR WEB SITE:
<http://www.bellecocooking.com>

877-854-8006 • FAX (207) 283-8080